

FLOS

String Lights, Round (12 m) - Specification Sheet

by Michael Anastassiades, 2014

Mounting	Ceiling Pendant
Lamp (Bulb) Description	1 LED ARRAY 2700K 1354lm CRI93 - 26W
Environment	Indoor - Dry Location
Finish	Black
Technical and Product Description	STRING LIGHTS suspension lamp providing diffused light. Matt black varnished die-cast aluminum body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 12 or 22 meters with Kevlar reinforced coaxial cable (the fixture should be relaxed and then re-tightened 24-hours after installation).

NOTE: Please connect the String Lights to an on/off switch. Dimming capability is only possible for electronics with optical mechanism and can be operated either with our [app](#) or by using the sensor on the luminaire.

This item requires the separate purchase of either a wall/ceiling connection CANOPY or BASE power supply with floor switch. Please select the appropriate Model/Color combination when making your purchase.

Please inquire for further details with customer service for installation guidance and refer to the [Installation Guide](#). You can also watch the installation video [here](#).

Electrical

Voltage	120
IP Rating	IP20


Physical

Cord Length (inches)	472" - Black
Construction Material	Aluminum, Polycarbonate
Weight	2.5 lbs



● F6480030 Black

Dimensional Image

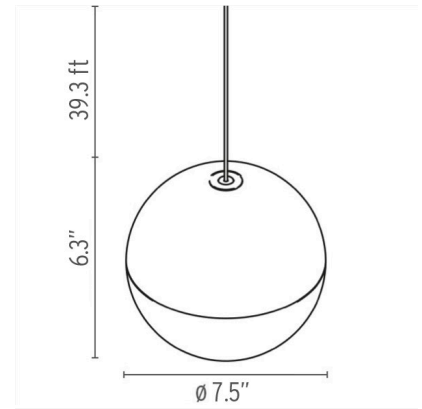

Certifications



CONTEXT

ENQUIRIES
info@contextgallery.com

Tel. 404. 477. 3301
Tel. 800. 886.0867

contextgallery.com
contextcontract.com

FLOS

String Lights, Round (12 m) with Canopy - Specification Sheet

by Michael Anastassiades, 2013

Mounting	Ceiling Pendant
Lamp (Bulb) Description	1 LED ARRAY 2700K 1980lm CRI93 - 26W
Environment	Indoor - Dry Location
Finish	Black w Canopy
Technical and Product Description	STRING LIGHTS suspension lamp providing diffused light. Matt black varnished die-cast aluminum body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 12 or 22 meters with Kevlar reinforced coaxial cable (the fixture should be relaxed and then re-tightened 24-hours after installation).

NOTE: Please connect the String Lights to an on/off switch. Dimming capability is only possible for electronics with optical mechanism and can be operated either with our [app](#) or by using the sensor on the luminaire.

This item requires the separate purchase of either a wall/ceiling connection CANOPY or BASE power supply with floor switch. Please select the appropriate Model/Color combination when making your purchase.

Please inquire for further details with customer service for installation guidance and refer to the [Installation Guide](#). You can also watch the installation video [here](#).



● F6480030C Black w Canopy

Certifications



Electrical

Voltage	120
IP Rating	IP20

Physical

Cord Length (inches)	472" - black
Construction Material	Aluminum, Polycarbonate
Weight	3.4 lbs



CONTEXT

ENQUIRIES
info@contextgallery.com

Tel. 404. 477. 3301
Tel. 800. 886.0867

contextgallery.com
contextcontract.com

FLOS

String Lights, Round (12 m) with Base - Specification Sheet

by Michael Anastassiades, 2014

Mounting	Ceiling Pendant
Lamp (Bulb) Description	1 LED ARRAY 2700K 1980lm CRI93 - 26W
Environment	Indoor - Dry Location
Finish	Black w Base
Technical and Product Description	STRING LIGHTS suspension lamp providing diffused light. Matt black varnished die-cast aluminum body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 12 or 22 meters with Kevlar reinforced coaxial cable (the fixture should be relaxed and then re-tightened 24-hours after installation).

NOTE: Please connect the String Lights to an on/off switch. Dimming capability is only possible for electronics with optical mechanism and can be operated either with our [app](#) or by using the sensor on the luminaire.

This item requires the separate purchase of either a wall/ceiling connection CANOPY or BASE power supply with floor switch. Please select the appropriate Model/Color combination when making your purchase.

Please inquire for further details with customer service for installation guidance and refer to the [Installation Guide](#). You can also watch the installation video [here](#).



● F6480030B Black w Base

Certifications



Electrical

Voltage	120
IP Rating	IP20

Physical

Cord Length (inches)	472" - black
Construction Material	Aluminum, Polycarbonate
Weight	5.04 lbs



CONTEXT

ENQUIRIES
info@contextgallery.com

Tel. 404. 477. 3301
Tel. 800. 886.0867

contextgallery.com
contextcontract.com