

FLOS

In Vitro Wall Anthracite 11W, 1150lm, 2700K, CRI 80 Integral 0-10V LED driver UL - Specification Sheet by Philippe Starck, 2020

Mounting	Wall
Lamp (Bulb) Description	LED 11W, 1150lm, 2700K, CRI 80
Canopy Dimension	667
Environment	Outdoor - Wet location
Dimming	0-10V
Finish	Anthracite
Technical and Product Description	Lighting outdoor collection with diffuse light for exterior ground installation. Integral opalescent diffuser and external protection in transparent borosilicate glass. The structure is made of die-cast and extruded aluminum treated with a chemical conversion process for effective resistance to atmospheric agents.

The body is powder coated and comes in various finishes. Integrated LED light source with Edge Lighting optical technology to guarantee perfect uniform lighting. Integrated 120V ON/OFF or dimmable electrical power supply.



● F018B22BU33 Anthracite


Electrical

Voltage	120-277
IP Rating	IP65

Physical

Supply	LED driver
Construction Material	Aluminum, Glass
Weight	4.4 lbs

Dimensional Image



IN VITRO WALL

Certifications




CONTEXT

ENQUIRIES
info@contextgallery.com

Tel. 404. 477. 3301
Tel. 800. 886.0867

contextgallery.com
contextcontract.com

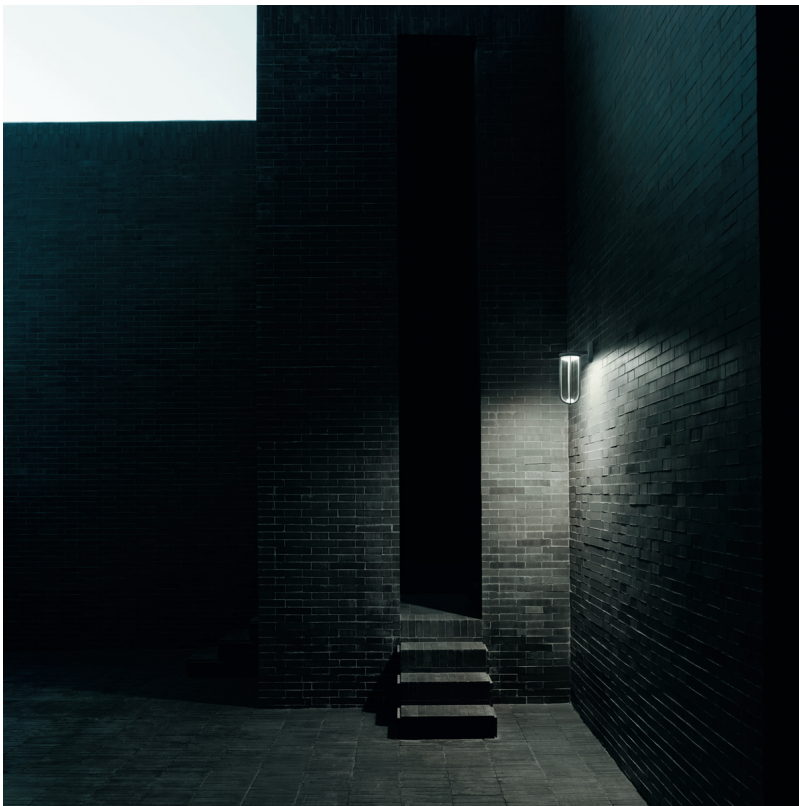

FLOS

In Vitro Wall Terracotta 11W, 1150lm, 2700K, CRI 80 Integral Not dimmable LED driver UL - Specification Sheet by Philippe Starck, 2020

Mounting	Wall
Lamp (Bulb) Description	LED 11W, 1150lm, 2700K, CRI 80
Canopy Dimension	667
Environment	Outdoor - Wet location
Dimming	Not dimmable
Finish	White
Technical and Product Description	"

Lighting outdoor collection with diffuse light for exterior ground installation. Integral opalescent diffuser and external protection in transparent borosilicate glass. The structure is made of die-cast and extruded aluminum treated with a chemical conversion process for effective resistance to atmospheric agents.


The body is powder coated and comes in various finishes. Integrated LED light source with Edge Lighting optical technology to guarantee perfect uniform lighting. Integrated 120V ON/OFF or dimmable electrical power supply.

"



○ F018B22AU01 White

Dimensional Image




IN VITRO WALL

Electrical

Voltage	120-277
IP Rating	IP65

Physical

Supply	LED driver
Construction Material	Aluminum, Glass
Weight	4.4 lbs

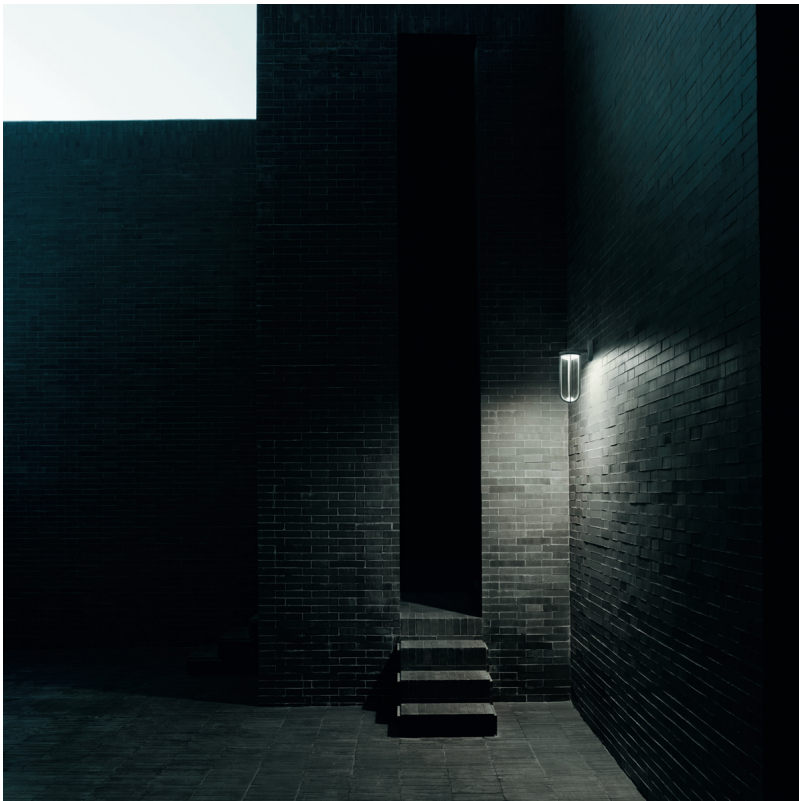

Certifications



CONTEXT

ENQUIRIES
info@contextgallery.com

Tel. 404. 477. 3301
Tel. 800. 886.0867

contextgallery.com
contextcontract.com