

FLOS

In Vitro Suspension Black 11W, 1150lm, 2700K, CRI 80 Integral Not dimmable LED driver UL - Specification Sheet by Philippe Starck, 2020

Mounting	Ceiling Pendant
Lamp (Bulb) Description	LED 13W, 1387lm, 2700K, CRI 80
Canopy Dimension	667
Environment	Outdoor - Wet location
Dimming	Not dimmable
Finish	Black

Electrical

Voltage	120-277
IP Rating	IP65


Physical

Supply	LED driver
Construction Material	Aluminum, Glass
Weight	2.8 lbs



● F018D25AU30 Black

Dimensional Image

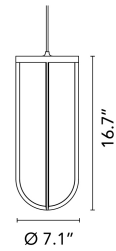

IN VITRO SUSPENSION

Certifications




CONTEXT

ENQUIRIES
info@contextgallery.com

Tel. 404. 477. 3301
Tel. 800. 886.0867

contextgallery.com
contextcontract.com

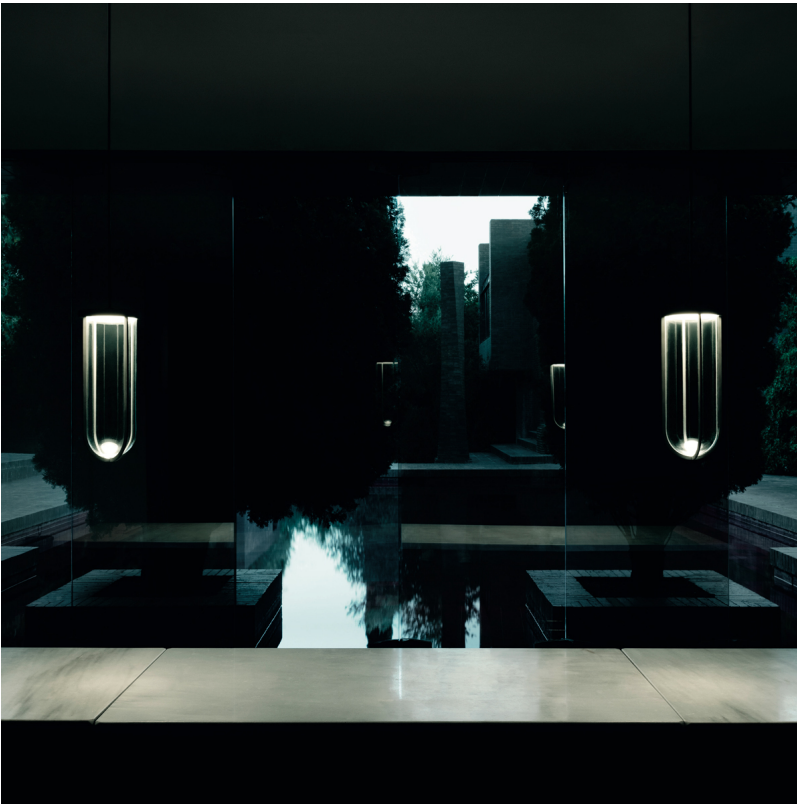

FLOS

In Vitro Suspension Black 11W, 1230lm, 3000K, CRI 80 Integral Not dimmable LED driver UL - Specification Sheet by Philippe Starck, 2020

Mounting	Ceiling Pendant
Lamp (Bulb) Description	LED 13W, 1474lm, 3000K, CRI 80
Canopy Dimension	714
Environment	Outdoor - Wet location
Dimming	Not dimmable
Finish	Black

Electrical

Voltage	120-277
IP Rating	IP65


Physical

Supply	LED driver
Construction Material	Aluminum, Glass
Weight	2.8 lbs



● F018D35AU30 Black

Dimensional Image



IN VITRO SUSPENSION

Certifications



FLOS

In Vitro Suspension Black 11W, 1230lm, 3000K, CRI 80 Integral 0-10V LED driver UL - Specification Sheet by Philippe Starck, 2020

Mounting	Ceiling Pendant
Lamp (Bulb) Description	LED 13W, 1474lm, 3000K, CRI 80
Canopy Dimension	714
Environment	Outdoor - Wet location
Dimming	0-10V
Finish	Black

Electrical

Voltage	120-277
IP Rating	IP65


Physical

Supply	LED driver
Construction Material	Aluminum, Glass
Weight	2.8 lbs



● F018D35BU30 Black

Dimensional Image



IN VITRO SUSPENSION

Certifications



FLOS

In Vitro Suspension Black 11W, 1150lm, 2700K, CRI 80 Integral 0-10V LED driver UL - Specification Sheet by Philippe Starck, 2020

Mounting	Ceiling Pendant
Lamp (Bulb) Description	LED 13W, 1387lm, 2700K, CRI 80
Canopy Dimension	667
Environment	Outdoor - Wet location
Dimming	0-10V
Finish	Black

Electrical

Voltage	120-277
IP Rating	IP65


Physical

Supply	LED driver
Construction Material	Aluminum, Glass
Weight	2.8 lbs



● F018D25BU30 Black

Dimensional Image



IN VITRO SUSPENSION

Certifications

