

NUVOLA PENDANT

Mario Bellini

Pendant, ceiling/wall and floor lamps. in natural opal polyethylene, in rotational printing. The floor version is also outdoor. Diffused lighting for a widespread and comfortable output. The pendant version is fastened to the ceiling with three suspension cables, adjustable with an outline included in the package. White canopy freely adjustable on the ceiling. The ceiling/wall version is composed by one of the two blocs (deep or flat, to choose) while the IP44 outdoor version has adjustable feet with possibility of ground fixing. All versions are dimmable. For the pendant version, DALI driver on request.



FLUO

LAMPING

Source	G5 T5 (FH-HO)
Total power	3x54W
Emission	diffused
Switching	dimnable, DALI on request
Tension	230V
Materials	polyethylene
Notes	cable lenght 3m, also available in 120V

Codes

NUV PWW 51


Structure

white

PACKAGE

Package 01 93x150x65 cm / Gross weight: 19 Kg

Certificazioni

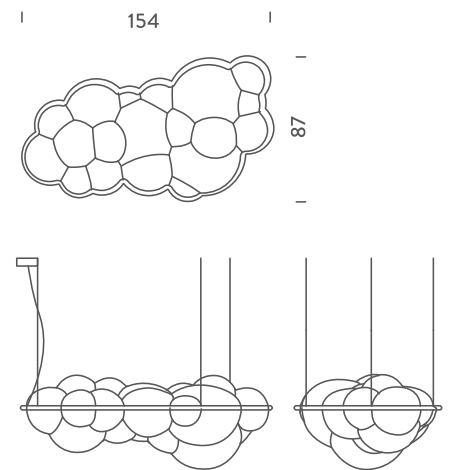

LED

LAMPING

Source	Linear LED
Total power	144W
Emission	diffused
Switching	dimmable, 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	13000lm (luminous output)
Typ cri	85
Energy class	A+
Materials	polyethylene
Notes	cable lenght 3m

Codes

NUV LWW 51

Structure

white

PACKAGE

Package 01

93x150x65 cm / Gross weight: 19 Kg

Certificazioni

