


# SAHCO

1831

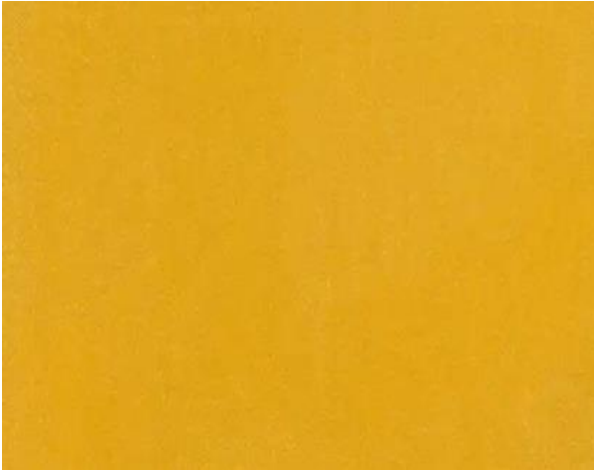

## Avalon 2

Type: Upholstery

*In accordance with California Bill AB 2998 and similar legislation within the United States, this product may not be used as upholstery. It can be used for vertical applications.*

Composition: 100% Trevira CS

Yarn type: Filament

Binding: Velvet

Width: Approx. 140 cm, 55 inches

Weight: Approx. 720 g/lin.m, 23 oz/ly

Repeat: None

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week.

Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water based glue. Pay attention to temperature and amount of cleaning fluid.

Velour/chenille fabrics should be vacuumed in the nap direction

Disinfection, see [www.kvadrat.dk/en/sahco](http://www.kvadrat.dk/en/sahco)



10 year warranty



### Abrasion

Approx. 100.000 Martindale rubs, EN ISO 12947

*Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention*

### Pilling

Note 4-5, EN ISO 12945

### Seam slippage

Seam parallel to warp: 1.9 mm parallel to weft: 1.3 mm  
EN ISO 13 936-2 180 Newton

### Lightfastness

Note 5-6 ISO 105-B02

### Fastness to rubbing

Dry note 4-5 ISO 105-X12

Wet note 4-5 ISO 105-X12

### Absorption

0.40/Class D (flat), 0.65/Class C (waved) EN ISO 354

### Airflow

7299 Pa s/m EN 29053

### Flame resistance

ASTM E84 Class A Unadhered

BS 5852 Crib 5

BS 5867 part 2 type B

DIN 4102 B1

EN 1021-1/2

EN 13501-1, B-s1, d0

GB 8624 B1

IMO FTP Code 2010 Part 8

NF P 92 507 M1

NFPA 701

SN 198 898 5.2

UNI 9175 1IM

UNI 9177 Classe 1

# SAHCO

1831

US Cal. Bull. 117-2013

## **ACT Guidelines Woven fabrics**

### **Flammability**

US Cal. Bull. 117-2013

### **Dry & Wet Crocking AATCC 8**

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.5

### **Colour Fastness to Light AATCC 16**

Grade 5.0 minimum 40 hours

### **Physical properties**

Pilling ASTM D3511 Class

Breaking Strength ASTM D5034 warp 127 / weft 193 lbs

Seam Slippage ASTM D4034 warp 112 / weft 104 lbs

### **Abrasion ASTM D4966**

100.000 cycles Martaindale – High Traffic / Public spaces

### **Quality benefits**

Complies with Möbelfakta

Very good abrasion

Good lightfastness

Permanent flame retardant

### **Environmental benefits**

Follow the EU Ecolabel dye restrictions incl. AZO dye and heavy metal restrictions

No use of halogen based flame retardants (incl. brominated and chlorinated)

No content of PFCs or 'PFAS'

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

### **Green building certificates**

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): Based on a

Health Product Declaration (HPD): Declaring textile content and substance

### **Country of origin**

Italy

### **Launch**

2020

### **Warranty**

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

[www.kvadrat.dk/en/sahco](http://www.kvadrat.dk/en/sahco)

## **CONTEXT**

### **ENQUIRIES**

[info@contextgallery.com](mailto:info@contextgallery.com)

Tel. 404. 477. 3301

Tel. 800. 886.0867

[contextgallery.com](http://contextgallery.com)